

► HIGH POWER LED Landscape Light

► LED Garden Spot Light



8355XB



8355X

RGBW4in1


- LED Colour Temperature
 - 2700K • 3000K
 - 4000K • 6000K
- optics
 - 8°/15°/25°/30°/45°/60°/90°

Housing color option

- Grey painting RAL9007
- Silver painting RAL9006
- Matt black RAL9005

Material specifications

Housing	12# Die-casting outdoor powder coated aluminum T=60-80µm.
Glass	Tempered glass, T=4mm
Lens	Optical lens, efficiency ≥ 85%
Cable gland	IP-68 PG-9 copper and nickel coated
Gasket	Molding shaped silicone double seal
LED	CREE XP-E LED/EDISON LED
PCB	Excellent heat conductivity aluminum, coefficient of Heat conductivity ≥ 2.0w/mk
Driver	Constant current output Single color LED=1-circuit output RGB 3in1 LED=3-circuit output
Operating temperature	-20°C-40°C
Power cable	H05RN-F 2x0.75mm² L=1m (low voltage) H05RN-F 3x0.75mm² L=1m (high voltage) H05RN-F 4x0.75mm² L=1m (for RGB)
Spike	PVC
Mounting base	Powder coated die-casting aluminum

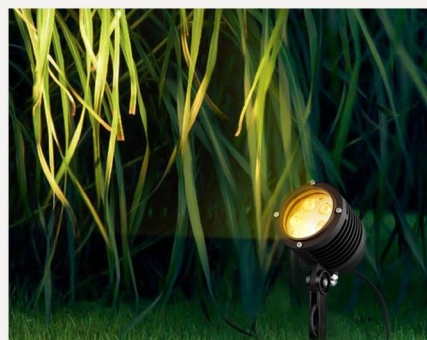

► GU10&MR16&E27

Changeable Socket spot light




835110B



835110BD

Outer Dimensions

Unit:mm

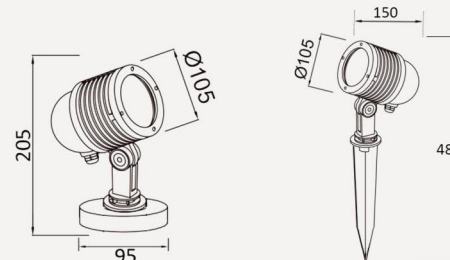

Input voltage is according to LED bulb spec

Item No.	Light source	Lens beam angle(°)	Consumption (watt)	Input Voltage(V)	Ik rate
83551 83551B	5x1W	8°/15°/20°/30°/45°/60°	5.3	DC24V	05
83551H 83551BH	5x1W	8°/15°/20°/30°/45°/60°	6.1	AC120V/AC240V	05
83552 83552B	5x2W	8°/15°/20°/30°/45°/60°	10.4	DC24V	05
83552H 83552BH	5x2W	8°/15°/20°/30°/45°/60°	12.5	AC120V/AC240V	05
83556 83556B	5x3W RGB3in1	30°/45°/60°	15.1	DC24V	05
83559 83559B	5x4W RGBW4in1 (W=3000/4000/6000K)	8°/15°/25°/30°/45°/60°	20.2	DC24V	05
835110B 835110BD	GU10 /E27/MR16 socket	N/A	N/A	N/A	05