

## COB LED Garden Spot Light/Dimmable



JPS71315

JPS61110

JPS51006

|                        |                   |
|------------------------|-------------------|
| LED Colour Temperature | optics            |
| • 2700K • 3000K        | • 15°/25°/38°/60° |
| • 4000K • 6000K        |                   |

Housing color option

Dark grey RAL7012

### Optional accessories

a. Triac Dimmer



b.Honecomb



c.Aluminum base




d.Aluminum spike



| Item No. | Light source | LED Driver   | Lens beam angle (°) | Consumption (watt) | Input Voltage( V ) | Ik rate |
|----------|--------------|--------------|---------------------|--------------------|--------------------|---------|
| JPS51006 | COB          | Triac Dimmer | 15°/25°/38°/60°     | 6W                 | DC24V/220-240V     | 0.6     |
| JPS61110 | COB          | Triac Dimmer | 15°/25°/38°/60°     | 10W                | DC24V/220-240V     | 0.6     |
| JPS71315 | COB          | Triac Dimmer | 15°/25°/38°/60°     | 15W                | DC24V/220-240V     | 0.6     |

Outer Dimensions: Unit:mm

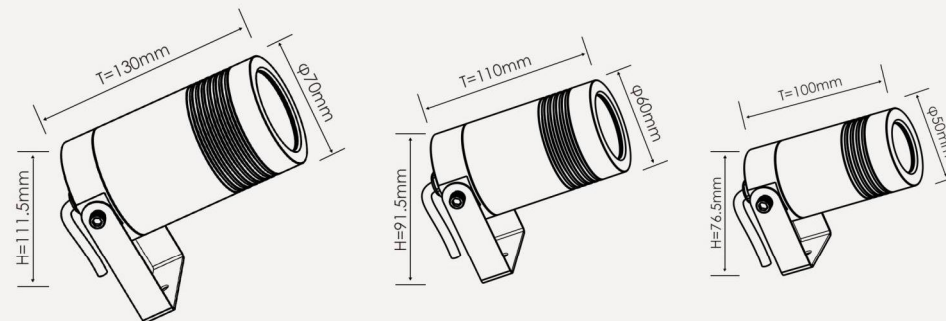


JPS71315

JPS61110

JPS51006

### 7W COB Distribution Curve Flux:

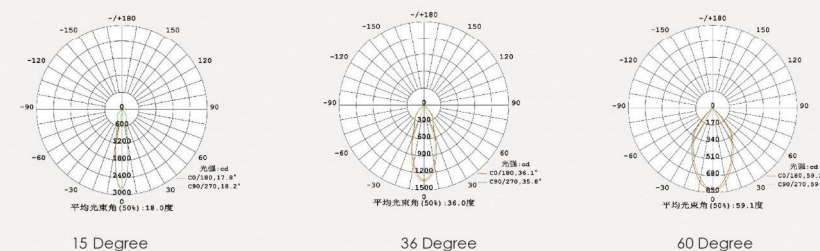

### Material specifications

|               |                                                                                                     |
|---------------|-----------------------------------------------------------------------------------------------------|
| Housing       | Aluminum anodized finishing & powder painting                                                       |
| Glass         | Tempered glass, T=3mm                                                                               |
| Lens          | Optical lens, efficiency≥85%                                                                        |
| Cable gland   | Copper and nickel coated                                                                            |
| Gasket        | Tooling shaped seal                                                                                 |
| LED           | CREE COB LED                                                                                        |
| Driver        | Constant current output                                                                             |
| Spike         | PVC(grey or black)                                                                                  |
| Mounting base | Aluminum anodized finishing or powder painting.                                                     |
| Power cable   | H05RN-F 2x0.75mm <sup>2</sup> L=1m(low voltage)<br>H05RN-F 3x0.75mm <sup>2</sup> L=1m(high voltage) |

